

## Community Development Department

501 N. Anderson, Ellensburg, WA 98926

(509) 962-7239 (Building) [permits@ci.ellensburg.wa.us](mailto:permits@ci.ellensburg.wa.us) (509) 962-7231 (Planning) [comedev@ci.ellensburg.wa.us](mailto:comedev@ci.ellensburg.wa.us)

### 15.320.120 Fences, walls, and hedges.

#### A. Residential Uses and Zones.

1. Front yard and between facade and street: 42 inches maximum height. Homes with accessory day care uses are allowed fences up to 48 inches tall, provided the portion of the fence above 42 inches is at least 50 percent transparent;



Figure 15.320.130(A)(1). Acceptable fences and walls for the front yard of residential uses. The left image uses a picket fence. The middle image uses a low wrought iron fence. The right image uses a low masonry retaining wall.

2. Corner lot, side yard, flanking street: 42 inches maximum fence or wall height for areas less than five feet from the property line or sidewalk, whichever is less (but not within the right-of-way). For homes with accessory day care uses, the maximum height in this area may be increased to 48 inches, provided the portion of the fence above 42 inches is at least 30 percent transparent. For areas at least five feet from the property line or sidewalk, whichever is less (but not within the right-of-way), the maximum fence or wall height is eight feet;
3. Side and rear yards: eight feet maximum fence or wall height, except that the maximum height of any fence less than five feet from a sidewalk shall be 42 inches. For homes with accessory day care uses, the maximum height in this area may be increased to 48 inches, provided the portion of the fence above 42 inches is at least 30 percent transparent;



Figure 15.320.130(A)(2). Acceptable and unacceptable fences on corner lots for side yard/flanking streets or along reverse frontage lots where the back yard abuts a street. The left example is a low picket fence. Taller fences like that in the middle image are acceptable along the side and rear yard, but are not allowed within five feet of a sidewalk. The right image shows an acceptable example where the fence is set back away from the sidewalk to allow space for landscaping.

4. Fences, walls and hedges less than three feet from an alley are limited to 42 inches in height. Fences or walls set back three feet or more from the alley may be up to six feet in height. Fences or walls at least 10 feet from an alley may be up to eight feet in height;

Fences directly adjacent to an alley

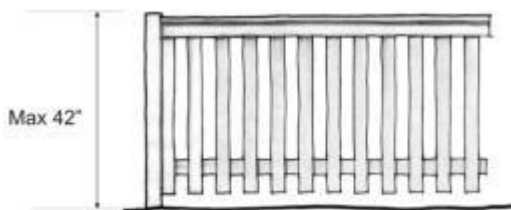


Figure 15.320.130(A)(3). Acceptable fences along an alley. The 42-inch fence on the left is allowed along the edge of an alley. The taller six-foot fence in the middle is allowed with a three-foot minimum setback from the alley.

5. Residential developments are subject to edges and fences provisions as set forth in ECC 15.420.030, which addresses gated communities and reverse frontage lots; and

6. Multifamily uses are subject to the following provisions:
  - a. Side/rear yard design provisions set forth in ECC 15.520.020; and
  - b. Blank wall treatment provisions as set forth in ECC 15.530.060.

B. All Other Uses and Zones.

1. Fences less than 10 feet from a streetfront property line or sidewalk, whichever is less (but not within the right-of-way), are limited to 42 inches in height. Day care uses are allowed fences up to 48 inches tall in this area, provided the portion of the fence above 42 inches is at least 30 percent transparent. Otherwise, the maximum height for fences shall be eight feet. Also see Section 3, Street Standards, of the city's public works development standards for sight distance requirements along streets and site access points;
2. Nonresidential uses are subject to side/rear yard design provisions set forth in ECC 15.520.020; and
3. Nonresidential uses are subject to blank wall treatment provisions as set forth in ECC 15.530.060.

C. Fence and Wall Measurements.

1. Fence and freestanding wall height shall be measured from the horizontal projection of the predominant ground level of either the finished grade where such grade has been established, or from the horizontal projection of the predominant existing grade in the vicinity of the fence; and
2. Fence height shall be measured to the upper surface of the fence panel.

D. Fence Material Standards.

1. Chain Link Fences.
  - a. Chain link fences are prohibited in residential zones and in yards associated with residential uses; and
  - b. Chain link fences are allowed in nonresidential zones subject to height limits set forth in subsection (B) of this section. Where visible from the street, such fences taller than 42 inches shall be screened with landscaping per the blank wall treatment standards set forth in ECC 15.530.060. Chain link fences visible from the street are encouraged to use blue or black vinyl coating.

2. No fence, wall or hedge shall contain barbed wire, electrical current or charge of electricity, broken glass or similar hazardous materials or devices except where livestock is to be contained by barbed or electrically charged wire, in which case the fence shall be located not closer than five feet from the property line. Where an adjacent existing fence, wall, or hedge on a property line dividing properties under separate ownership establishes a barrier, then such barbed wire fence or electrically charged fence may be placed on the property line with the mutual consent of the property owners. Fences enclosing storage areas in industrial zones (I-L and I-H) may use barbed wire so long as such wire is located not less than six feet above grade. [Ord. 4807 § 46, 2018; Ord. 4656 § 1 (Exh. O2), 2013. Formerly 15.320.130.]